



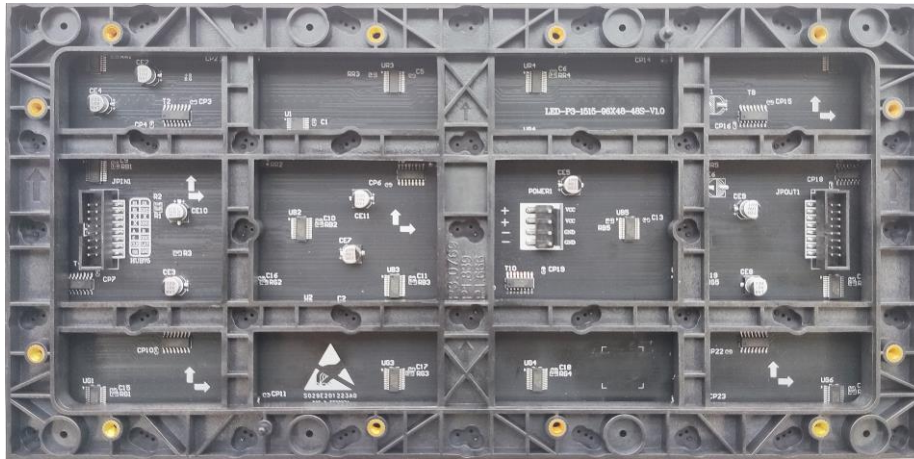


# Product Specification

## Indoor P3.3

## Product Picture of Indoor P3.3 Series

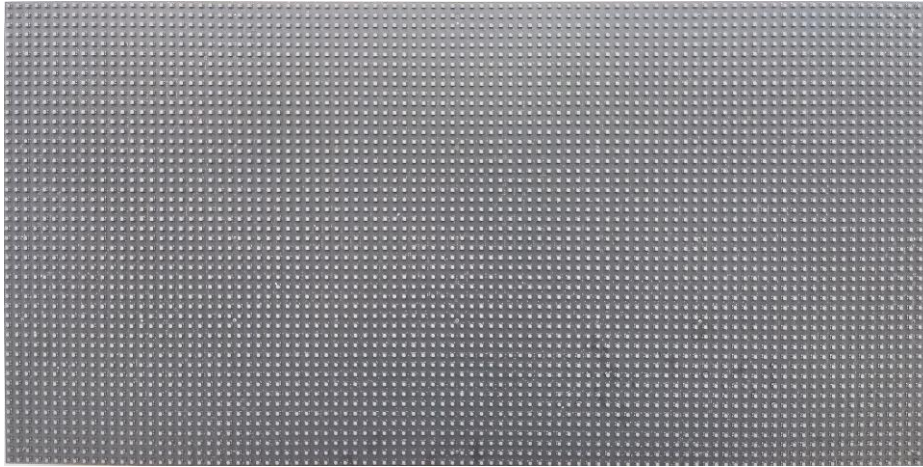

## Hole Position of Indoor P3.3 Series

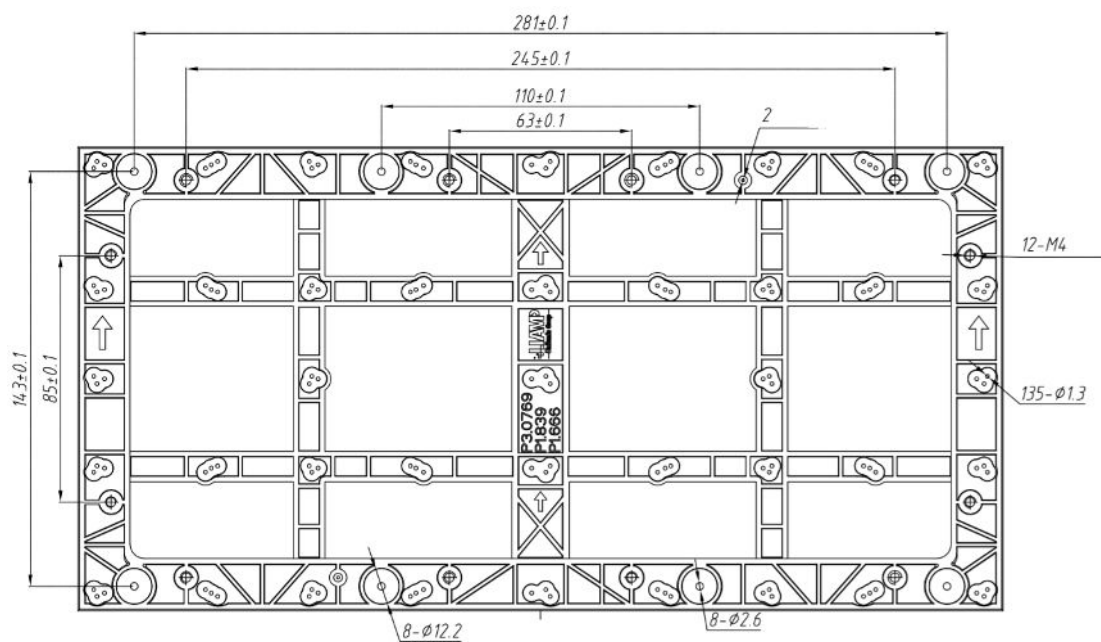

## Parameter of Indoor P3.3 Series

	Parameter Name	Product Parameter
<b>Module</b>	LED Type	SMD1515
	Pixel Pitch	3.3mm
	Module Resolution (W×H)	96X48=4608 Pixels
	HUB	HUB75
	Module Dimension	320mm×160mm×16 mm
	Module Weight	0.33±0.02kg
<b>Optical</b>	Single-dot Brightness Calibration	Support
	White Balance Brightness	≥400 CD/m <sup>2</sup>
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable )
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
<b>Electronic</b>	Input Power <Max>	≤341.8W/m <sup>2</sup>
	Input Power <Typical>	≤113.9W/m <sup>2</sup>
	Power Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
<b>Performance</b>	Frame Changing Frequency	≥60Hz
	Drive Mode	Constant Current Drive / 48 Scan
	Gray Level	12~14 Bit
	Refresh Rate	≥3840Hz
	Video Support	2K HD, 4K UHD
<b>Environment</b>	Life Typical Value (HRS)	50000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%-65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%-60%RH (No Condensation)

- Remark: 1. The above parameters are typical or recommended  
 2. Product parameters or configuration adjustments without notice  
 3. Customized products, please confirm the parameters with our company